

Chapter 2

Voltage, Current and Power

Voltage Current and Power

- Electrical power source
 - Electricity grid (socket)
 - Batteries for small, portable devices (need to be replaced / recharged)

$$P = V \cdot I \quad (2.1)$$

| Quantity | Unity | Symbol |
|--------------------------|------------|--------|
| Voltage, potential diff. | Volt (V) | V |
| Current | Ampere (A) | I |
| Power | Watt (W) | P |

Table 2.1: *Electrical quantities with their respective unities and symbols.*

Electrical Power vs. Electrical Energy

- **Electrical energy** is the power consumed during a period of time.
 - Unity: J (Joule)
 - Watt-hour (W·h) or the kiloWatt-hour (kW·h)

*“We used *** electric power in this month” or
“We used *** electrical energy in this month”?*

A simple calculation:

How much electrical energy will a light bulb use?

Direct Current (DC)

Two types of electrical power sources:

- Batteries
 - Electricity grid (socket)
-
- Direct Current (DC)
 - Current always flows in the same direction.
 - Alternating Current (AC)
 - The direction of current alternates.

Direct Current (DC)

Features of an DC voltage source

- Constant voltages are supplied.
- An ideal DC voltage source:
the voltage is independent of the magnitude and duration of the current.
- Batteries are not the only DC sources. Why?
- DC sources connected to the electricity grid
- Behave like ideal DC-sources.

Direct Current (DC)



Note

When doing experiments which require a constant voltage, you can make use of a DC-power source. These sources have at least two connections: the mass (black) and the positive potential (red). The mass can be seen as the ground and we take its potential as 0 V. The potential difference between the black and red connection is the voltage supplied by the source. In Appendix D you can find more information about the most common sources you will be using at the university.



Figure 19.1: A laboratory power supply.

Alternating Current (AC)

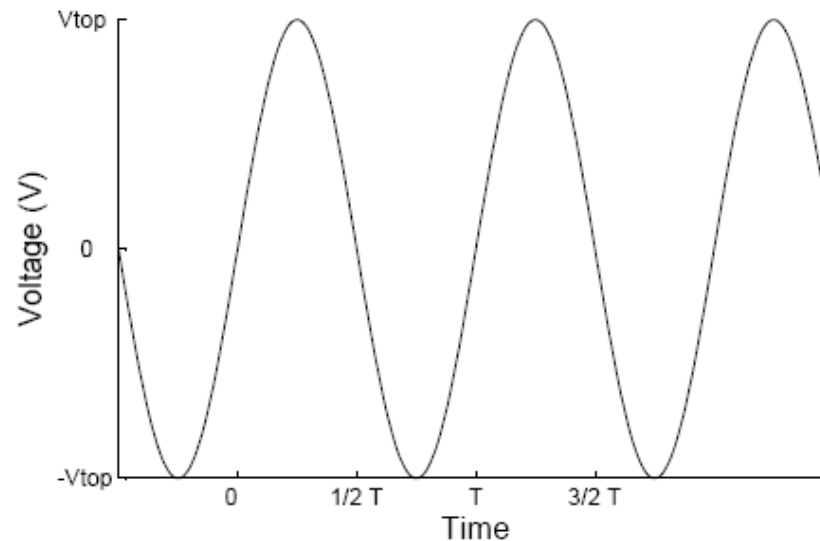


Figure 2.1: *Example of an AC sine waveform.*

- Potential difference between the two plugs of the contact alternates.
- If we put a resistance between the plugs, we could see that the current alternates.

Alternating Current (AC)

$$V(t) = V_{top} \cdot \sin(2\pi \cdot f \cdot t + \varphi)$$

f : frequency of the signal

V_{top} : the peak value or amplitude

t : time

T : the period of the sine wave ($T=1/f$)

ω : the frequency of rotation ($\omega = 2 \cdot \pi \cdot f$)

φ : phase, can be zero [equation (2.2)].

- In the Netherlands, $f = 50$ Hz, $V_{top} = 325$ V (why not 230 V?)
- A lamp connected to the electricity grid goes on and off twice during one cycle.
- A combination/superposition of an AC voltage (V_{AC}) and a DC (V_{DC}) voltage
 - V_{DC} is called an offset voltage.
 - This will be illustrated later, when you start working with a function generator.

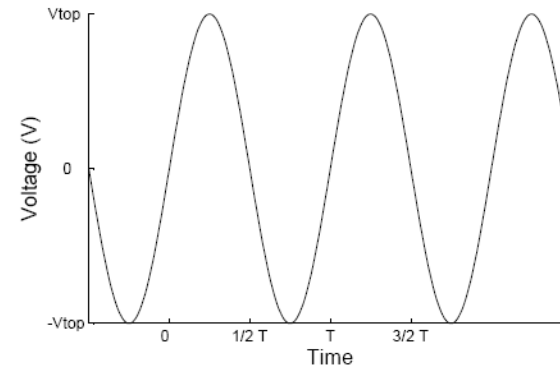


Figure 2.1: Example of an AC sine waveform.

RMS Values

RMS: Root Mean Square

- Why RMS?
 - V_{top} is not a good measure of AC voltages.
 - AC voltage changes all the time.
- **RMS value** - The effective value of a varying voltage or current. It is the equivalent steady DC (constant) value which has the same heating potential.
- RMS is also called the effective DC value.

RMS Values

$$\frac{V_{RMS}^2}{R} = \left(\frac{V^2}{R}\right)_{\text{mean of period}} \quad (2.3)$$

where V_{RMS} is the RMS value (DC equivalent) of $V(t)$. Since R is constant, we get:

$$V_{RMS}^2 = (V^2)_{\text{mean of period}} \quad (2.4)$$

Since V_{RMS} should be positive, this results in:

$$V_{RMS} = \sqrt{(V^2)_{\text{mean of period}}} \quad (2.5)$$

The value of $(V^2)_{\text{mean of period}}$ can be calculated by summing up all the instantaneous values of $V^2(t)$ during one period, divided by the number of values ($\frac{1}{N}(V^2(t_1) + V^2(t_2) + \dots + V^2(t_N))$). This can be expressed as follows:

$$(V^2)_{\text{mean of period}} = \frac{1}{T} \int_0^T V(t)^2 dt. \quad (2.6)$$

RMS Values

!! For a true sine wave


$$V_{RMS} = 0.7 \cdot V_{peak}, \quad (2.7)$$

$$V_{peak} = 1.4 \cdot V_{RMS}. \quad (2.8)$$

RMS is not a simple average!

Sine Waves

- Sine waves are the most common type of AC.
 - A dynamo on your bike is a small generator.
 - A combination of mechanical and electromagnetic properties generates a sinusoidal signal.

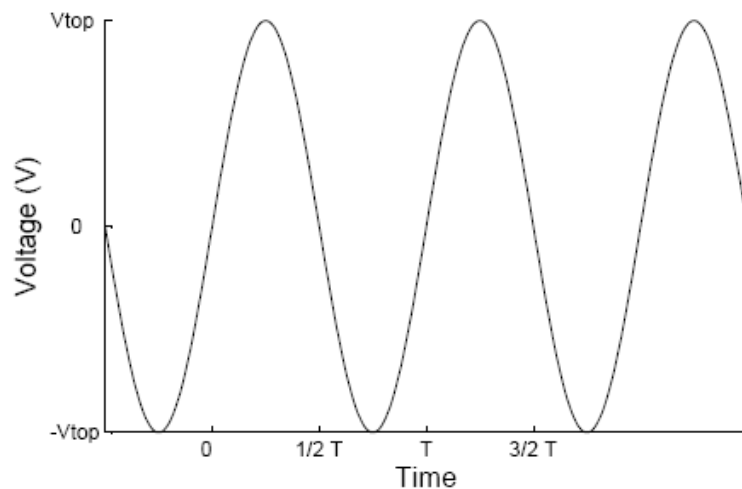

$$V(t) = V_{top} \cdot \sin(2 \cdot \pi \cdot f \cdot t) \quad (2.2)$$

Figure 2.1: *Example of an AC sine waveform.*

Sine Waves

- The rotating field in the generator can be seen as a vector.
- The sine wave is a projection of this vector onto a certain axis.

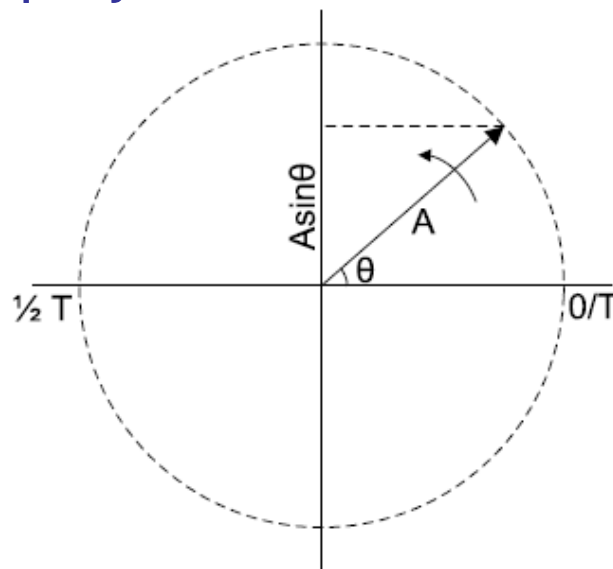



Figure 2.2: *The projection of a rotating vector on the y-axis results in a sine wave.*

The change in θ over time is ω , which is related to the period time T by $\omega = 2\pi/T$.

Energy vs. Information

- Voltages and currents are related to the electrical energy consumption of circuits.
- Voltages and currents are also used to transmit / receive information.
 - Waveforms (sound wave)
 - Digital bits (code)

Symbols of Sources and Meters

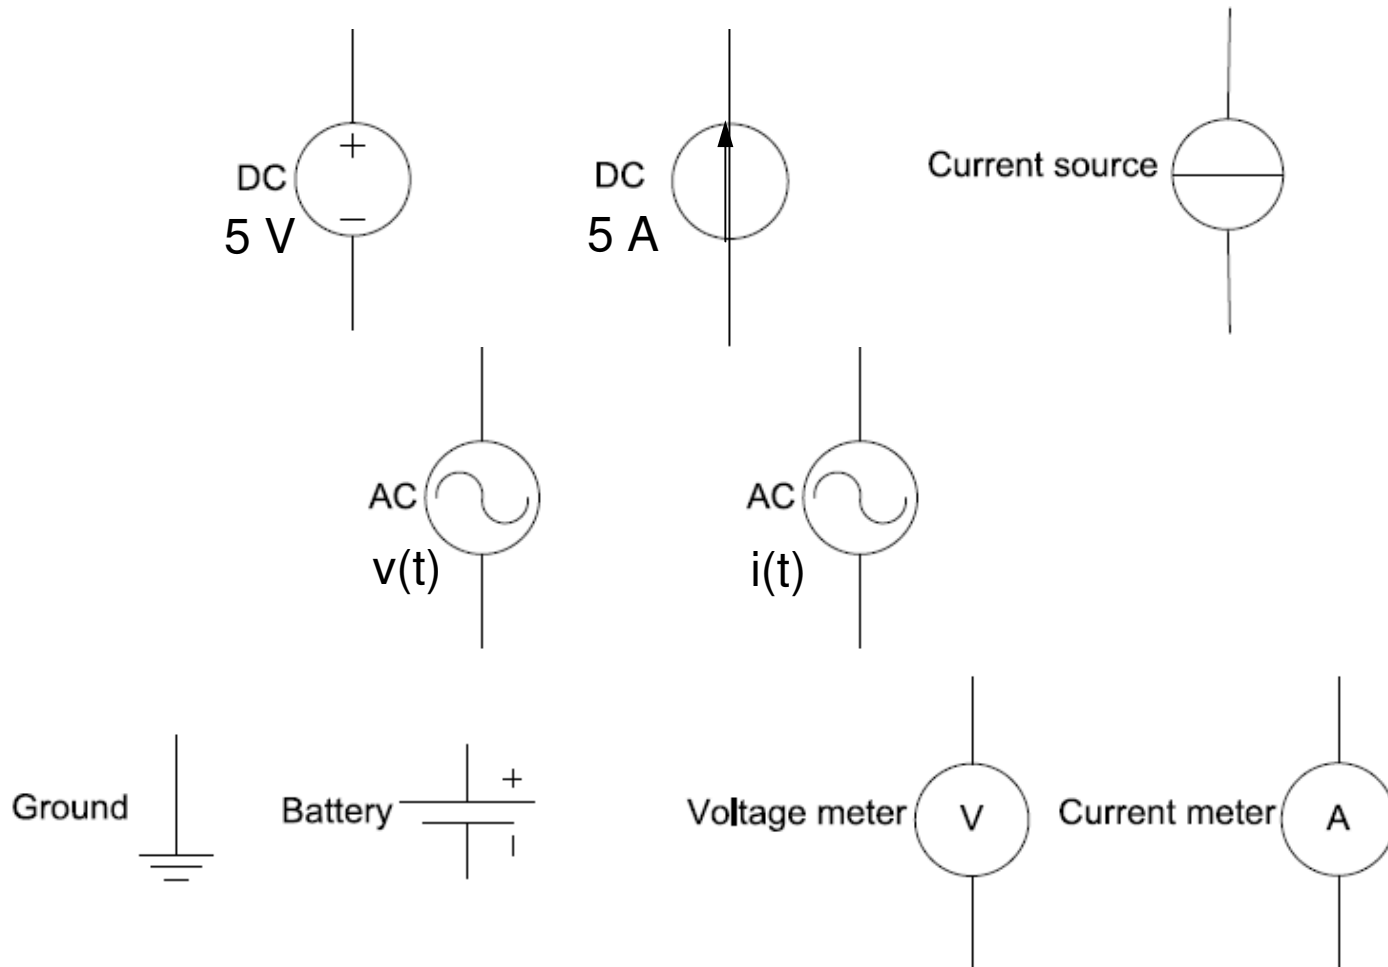

Exercise – RMS Calculation

For a sinusoidal signal,


$$V(t) = V_{top} \cdot \sin(2 \cdot \pi \cdot f \cdot t) \quad (2.2)$$

Calculate its RMS by

$$V_{RMS}^2 = \frac{1}{T} \int_0^T V^2(t) dt$$

$$V_{RMS} = \sqrt{\frac{1}{T} \int_0^T V^2(t) dt}$$

Exercise – RMS Calculation



Exercise – RMS Calculation

$$\begin{aligned}V_{RMS}^2 &= \frac{1}{T} \int_0^T V_{top}^2 \sin^2(2\pi ft) dt \\&= \frac{V_{top}^2}{T} \int_0^T \frac{1 - \cos(4\pi ft)}{2} dt && \leftarrow \text{based on} \\& && \text{Trigonometric identities} \\&= \frac{V_{top}^2}{2T} \left[\int_0^T 1 dt - \int_0^T \cos(4\pi ft) dt \right] \\&= \frac{V_{top}^2}{2}\end{aligned}$$

Therefore,

$$V_{RMS} = \frac{V_{top}}{\sqrt{2}} \approx 0.7V_{top}$$